Appendix D1

Technical support document for the development of MOVES2014a onroad mobile emissions inventories for 2014, 2025, and 2030



DEVELOPMENT OF OZONE ON-ROAD MOBILE EMISSIONS INVENTORIES

Prepared for the 2008 Ozone National Ambient Air Quality Standards Redesignation Request and Maintenance Plan for the Washington, D.C. metropolitan region.

June 2017



DEVELOPMENT OF OZONE ON-ROAD MOBILE EMISSIONS INVENTORIES

June 2017

ABOUT THE TPB

The National Capital Region Transportation Planning Board (TPB) is the federally designated metropolitan planning organization (MPO) for metropolitan Washington. It is responsible for developing and carrying out a continuing, cooperative, and comprehensive transportation planning process in the metropolitan area. Members of the TPB include representatives of the transportation agencies of the states of Maryland and Virginia and the District of Columbia, 24 local governments, the Washington Metropolitan Area Transit Authority, the Maryland and Virginia General Assemblies, and nonvoting members from the Metropolitan Washington Airports Authority and federal agencies. The TPB is staffed by the Department of Transportation Planning at the Metropolitan Washington Council of Governments (COG).

CREDITS

Kanti Srikanth, Director, Department of Transportation Planning Ronald Milone, Program Administrator

William Bacon Anant Choudhary Jinchul Park Jane Posey Ho Jun Son Dusan Vuksan Feng Xie

ACCOMMODATIONS POLICY

Alternative formats of this document are available upon request. Visit www.mwcog.org/accommodations or call (202) 962-3300 or (202) 962-3213 (TDD).

TITLE VI NONDISCRIMINATION POLICY

The Metropolitan Washington Council of Governments (COG) fully complies with Title VI of the Civil Rights Act of 1964 and related statutes and regulations prohibiting discrimination in all programs and activities. For more information, to file a Title VI related complaint, or to obtain information in another language, visit www.mwcog.org/nondiscrimination or call (202) 962-3300.

El Consejo de Gobiernos del Área Metropolitana de Washington (COG) cumple con el Título VI de la Ley sobre los Derechos Civiles de 1964 y otras leyes y reglamentos en todos sus programas y actividades. Para obtener más información, someter un pleito relacionado al Título VI, u obtener información en otro idioma, visite www.mwcog.org/nondiscrimination o llame al (202) 962-3300.

Copyright © 2017 by the Metropolitan Washington Council of Governments

TABLE OF CONTENTS

1. INTRODUCTION	1
2. BACKGROUND	1
3. OVERVIEW OF METHODS AND PLANNING ASSUMPTIONS	1
4. TRAVEL DEMAND MODEL AND INPUTS	4
5. MOVES MODEL INPUTS	6
5.1 POST PROCESSOR	6
5.2 VMT/VHT FRACTIONS	7
5.3 AVERAGE SPEED	8
5.4 ROAD TYPE	12
5.5 AGE DISTRIBUTION	12
5.6 FUEL FORMULATION	13
5.7 METEOROLOGY DATA	13
5.8 RAMP FRACTION	13
5.9 ROAD TYPE DISTRIBUTION	
5.10 SOURCE TYPE (VEHICLE) POPULATION	15
5.11 INSPECTION/MAINTENANCE (I/M) PROGRAMS & HOTELING	16
5.12 FEDERAL AND STATE SPECIFIC CONTROL PROGRAMS	16
6.0 RESULTS	17

ATTACHMENTS

TABLES

Table 1 Travel-Related Assumptions/Methods Used in the Inventories	2
Table 2 Non-Travel Related Assumptions and Methods Used in the Inventories	2
Table 3 Household Data by Jurisdiction by Year	4
Table 4 Employment Data by Jurisdiction and Year	5
Table 5 Average Weekday Vehicle Miles Traveled by Jurisdiction	5
Table 6 Average Weekday VHT Distribution for Refuse Trucks	11
Table 7 VHT Distribution of School Buses (6:00 am - 6:00 pm)	11
Table 8 VHT Distribution of Transit Buses	12
Table 9 Vehicle Population by Analysis Year	15
Table 10 Ozone Maintenance Plan On-Road Emissions Inventories (short tons/day)	17
Table 11 Ozone Maintenance Plan On-Road Emissions Inventories by Jurisdiction	18
FIGURES	
Figure 1 Washington DC-MD-VA Ozone Maintenance Area Map	3
Figure 2 Post-Processing of Travel Demand Results	
Figure 3 Annual VMT Calculation Process	8
Figure 4 Road Type Distribution Development Process	14
Figure 5 Source Type Population Development Process of Future Analysis Year	16

1. INTRODUCTION

This report documents the development of on-road emissions inventories used in the 2008 Ozone National Ambient Air Quality Standards (NAAQS) Redesignation Request and Maintenance Plan for the Washington, D.C. metropolitan region. The inventories were developed by Transportation Planning Board (TPB) staff at the request of the Metropolitan Washington Air Quality Committee (MWAQC). The on-road inventories will later be combined with emissions estimates developed for other sources to formulate a complete accounting of ground-level ozone in the region. This report summarizes the planning assumptions and technical methods supporting the on-road inventory development and presents results at the jurisdiction level. The inventory addresses three pollutants: Carbon Monoxide (CO), Nitrogen Oxides (NOx), and Volatile Organic Compounds (VOC). Pollutant estimates were prepared for three analysis years: 2014, 2025, and 2030. A summary of results is included at the end of the report.

2. BACKGROUND

In 2012 EPA designated the Metropolitan Washington, DC-MD-VA region as a "moderate" nonattainment area for the 2008 Ozone NAAQS. In 2015, the region attained the 2008 standard, based on the readings from ambient air quality monitors. In 2016 the region began development of a Redesignation Request and Maintenance Plan, which includes Motor Vehicle Emissions Budgets (MVEBs or mobile budgets) for NOx and VOC.

3. OVERVIEW OF METHODS AND PLANNING ASSUMPTIONS

Mobile emission inventories are developed on a year-by-year basis using the regional travel demand model and the EPA MOVES model. Several sequential steps are undertaken for each year that is analyzed. First, the Transportation Planning Board's (TPB's) adopted travel demand model is used to formulate vehicle-miles-of-travel (VMT) at the network link level of analysis. The modeled VMT outputs are developed at the network link level by vehicle type and by four time periods. Next, a post processor is used to further refine link-level VMT link speeds into Vehicle-Hours-of-Travel (VHT) by facility type, hourly periods and speed "bins." Finally, several data preparation steps are undertaken before the MOVES mobile emissions model is executed on a jurisdictional basis in order to compute mobile emissions. An overview of the travel model, post processor and MOVES data preparation steps is presented below.

The TPB staff developed 2014 travel-related data specifically for the 2008 Ozone Maintenance Plan. The 2025 and 2030 travel demand-related inputs were identical to those used in the recent air quality conformity analysis of the 2016 CLRP,¹ which was approved by the Transportation Planning Board on November 16, 2016. The key planning assumptions and methods are listed in Table 1. The modeling methods include the TPB's currently adopted travel demand model, Version 2.3.66²³⁴, and the EPA

¹ Air Quality Conformity Analysis of the 2016 Constrained Long Range Plan Amendment and the FY2017-2022 Transportation Improvement Program for the Washington Metropolitan Region, MWCOG/TPB, November 16, 2016

² Calibration Report for the TPB Travel Forecasting Model, Version 2.3, on the 3722-Zone Area System. Final Report. Washington DC: National Capital Region Transportation Planning Board, January 20, 2012. http://www.mwcog.org/transportation/activities/models/files/FY2012/V2.3_Calibration_Report_v14.pdf

³ "2010 Validation of the Version 2.3 Travel Demand Model", Technical Memorandum from Ronald Milone - June 30, 2013. http://www.mwcog.org/transportation/activities/models/files/2010_Validation_Memo_v3.pdf

⁴ User's Guide for the COG/TPB Travel Demand Forecasting Model, Version 2.3.66, Volume 1 of 2: Main Report and Appendix A (Flowcharts). Washington, D.C.: Metropolitan Washington Council of Governments, National Capital Region

MOVES2014a emissions model. The land activity projections used in the travel demand modeling are based on the Round 9.0 Cooperative Forecasts.

Table 1 Travel-Related Assumptions/Methods Used in the Inventories

Land Activity:	COG Round 9.0 Cooperative Forecasts
Travel Demand Model:	Version 2.3.66
Mobile Emissions Model:	MOVES2014a
Vehicle Registration Data:	2014 Vehicle Registration Inventories

The non-travel related inputs to the MOVES2014a model, relating to meteorology, inspection and maintenance programs, and fuel formulation and supply, were provided by state air agencies in coordination with COG's Department of Environmental Programs (DEP). DEP staff provided modeling assumptions and guidance in a December 12, 2016 e-mail (Attachment A). All of the non-travel-related inputs were identical to those used in the 2016 CLRP with the exception of meteorology⁵ and Inspection/Maintenance (I/M) inputs. With regard to meteorology differences, the hourly temperature used in the 2008 ozone Maintenance Plan inventory development was lower and the relative humidity was generally higher than that assumed in the 2016 Air Quality Conformity analysis. The State of Maryland I/M inputs were updated for the 2008 Ozone Maintenance Plan to reflect the current requirements, while they remain the same for Virginia and District of Columbia. The non-travel related assumptions and methods underlying the ozone emissions inventories are listed in Table 2.

Table 2 Non-Travel Related Assumptions and Methods Used in the Inventories


Inspection& Maintenance Programs:	Year-specific programs/MOVES2014a format
Fuel Programs:	Year-specific programs/MOVES2014a format
Meteorology:	July 2014 data from Dulles Airport

The Washington, D.C region Ozone Maintenance Area includes the following jurisdictions: Washington, D.C., Montgomery County, Prince George's County, Frederick County, Charles County, Calvert County, the City of Alexandria, Arlington County, Fairfax County, Loudoun County, and Prince William County. The cities and towns within each jurisdiction are also included. The Ozone Maintenance Area and the area associated with travel modeling is shown in Figure 1.

Transportation Planning Board, February 13, 2017. https://www.mwcog.org/assets/1/6/mwcog_tpb_travel_model_v2.3.66_user_guide_v14_with_app_a.pdf

Meteorology data in the 2016 CLRP is based on the 1997 Ozone NAAQS attainment SIP, which was developed based on the average temperature and relative humidity data from Dulles and National airports for the top 10 highest ozone level days during 2002-2004; 2008 Ozone Maintenance Plan temperature and humidity data were developed using the July 2014 meteorology data from Dulles airport.

Figure 1 Washington DC-MD-VA Ozone Maintenance Area Map

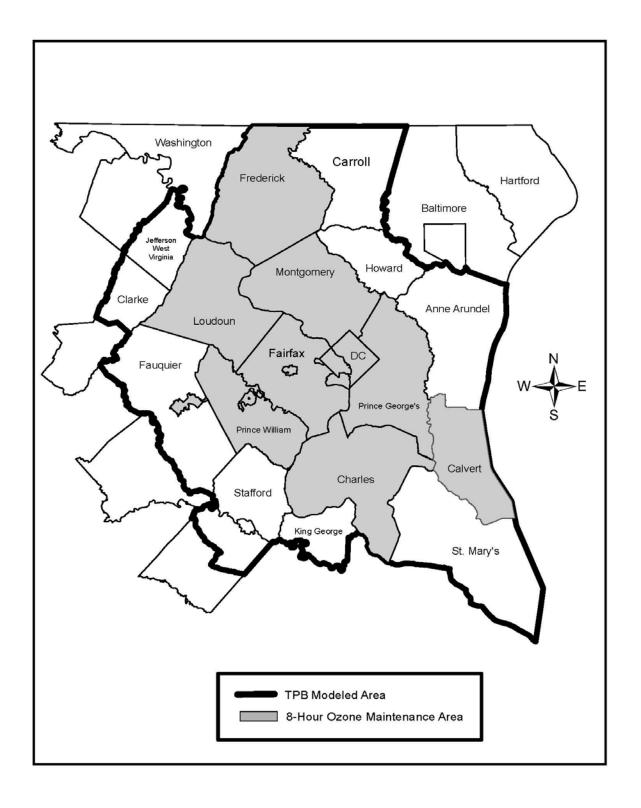

4. TRAVEL DEMAND MODEL AND INPUTS

The Version 2.3.66 travel model is a trip-based (or four-step) forecasting process that operates on a 3,722 Transportation Analysis Zone (TAZ) system. The model was initially calibrated using the 2007/08 Household Travel Survey and several on-board transit surveys.⁶ The model was subsequently revised and re-validated using 2010 data, including traffic counts, Metrorail electronic counts, the American Community Survey, and the Geographically Focused Household Travel Survey⁷. The model also includes a long-standing policy feature that constrains peak period Metrorail trips to and through the regional "core." This feature ensures that forecasted ridership is reasonably consistent with expected capacity of the Metrorail system. The Version 2.3.66 model is documented in the most recent User's Guide⁸.

The COG Round 9.0 Cooperative Forecasts are projections of households, population, and employment (by type), prepared at the TAZ level. Household and employment summaries by jurisdiction for the specific Ozone Maintenance Plan analysis years are provided in Tables 3 and 4, respectively.

Table 3 Household Data by Jurisdiction by Year

Jurisdiction	2014	2025	2030
District of Columbia	291,038	341,019	362,524
Montgomery Co., MD	371,608	405,562	422,342
Prince George's Co., MD	317,731	343,865	355,494
Arlington Co., VA	102,523	115,238	120,666
City of Alexandria, VA	70,573	80,779	84,118
Fairfax Co., VA	415,156	461,293	485,201
Loudoun Co., VA	117,776	150,760	158,568
Prince William Co., VA	157,001	184,406	194,239
Frederick Co., MD	88,528	107,934	115,066
Charles Co., MD	53,176	65,529	72,911
Calvert Co., MD	31,958	36,125	37,350
Total	2,017,068	2,292,510	2,408,479

Source: Round 9.0 Cooperative Forecasts

⁶ TPB, Calibration Report for the TPB Travel Forecasting Model, Version 2.3, on the 3722-Zone Area System.

⁷ Milone, "2010 Validation of the Version 2.3 Travel Demand Model"

⁸ TPB, User's Guide for the COG/TPB Travel Demand Forecasting Model, Version 2.3.66, Volume 1 of 2: Main Report and Appendix A (Flowcharts).

Table 4 Employment Data by Jurisdiction and Year

Jurisdiction	2014	2025	2030
District of Columbia	787,878	895,120	937,854
Montgomery Co., MD	514,849	572,521	604,491
Prince George's Co., MD	337,653	366,326	375,741
Arlington Co., VA	212,145	225,194	242,136
City of Alexandria, VA	105,568	121,772	127,266
Fairfax Co., VA	681,005	788,281	831,913
Loudoun Co., VA	159,886	211,000	235,476
Prince William Co., VA	170,075	217,510	238,297
Frederick Co., MD	105,437	115,618	121,283
Charles Co., MD	46,459	49,227	52,196
Calvert Co., MD	33,727	39,500	40,900
Total	3,154,682	3,602,069	3,807,553

Source: Round 9.0 Cooperative Forecasts; Includes Census Adjustment

The travel demand model produces a wide array of outputs including zonal origins and destinations by travel volumes and by travel network segments. Modeled VMT is the most critical output of the travel model for the purpose of estimating on-road emissions. The jurisdiction level VMT results estimated by the Version 2.3.66 travel demand model, the 2016 CLRP network and the Round 9.0 Cooperative Forecasts are shown in Table 5. The VMT estimates shown reflect on-network travel only and do not include local road VMT.

Table 5 Average Weekday Vehicle Miles Traveled by Jurisdiction and Year

Jurisdiction	2014	2025	2030
District of Columbia	8,179,181	8,631,346	8,839,109
Montgomery Co., MD	21,650,210	23,530,206	24,728,697
Prince George's Co., MD	23,235,228	25,212,143	26,074,471
Arlington Co., VA	3,880,103	4,159,667	4,250,797
City of Alexandria, VA	2,459,323	2,703,856	2,773,470
Fairfax Co., VA	26,219,999	29,349,765	30,273,391
Loudoun Co., VA	7,434,601	9,231,321	9,662,351
Prince William Co., VA	9,380,430	11,328,126	12,336,037
Frederick Co., MD	8,746,566	9,952,232	10,859,402
Charles Co., MD	3,010,776	3,450,040	3,804,944
Calvert Co., MD	1,741,395	1,980,630	2,109,955
Total	115,937,812	129,529,332	135,712,624

5. MOVES MODEL INPUTS

This section reviews the data inputs that were prepared for the MOVES model. The MOVES model is currently executed on a year-specific basis, for each jurisdiction in the Ozone Maintenance Area. As such, jurisdiction-level databases (or Excel files) are prepared in a format that is consistent with prescribed specifications in the software documentation. Some inputs are prepared as parameters that are indicated in MOVES-related scripting. TPB currently executes the MOVES2014a model in the "inventory" mode.

When EPA released initial versions of the MOVES emissions model, a regional task force was formed to provide guidance on MOVES-related inputs that would be acceptable to regional stakeholders. Staff from both transportation and environmental agencies served on the task force. During 18 monthly meetings, between August 2009 and January 2010, the task force agreed to an approach for developing emissions inventories using MOVES. A summary table of the approach is included as Attachment B.

5.1 Post Processor

A post processor is used to reformat network link-level outputs from the travel model into MOVES compatible format. The post processor is used to create vehicle hours of travel (VHT) and vehicle miles traveled (VMT) distributions by jurisdiction. The jurisdictional distributions are further distinguished by three vehicle types (passenger vehicles, commercial vehicles, and trucks), two facility types (freeways and arterials), and 14 speed groups or "bins."

The post processor aggregates six travel markets from the travel demand model outputs into three vehicle types as follows:


- Passenger Vehicles = SOV + HOV2 + HOV3 (or more) + Airport Passenger Trips;
- Commercial Vehicles = Commercial Vehicles;
- Heavy Duty Vehicles = Trucks;

Six facility types are grouped into two as follows:

- Freeway = freeway + expressway + freeway ramp; and
- Arterials = major arterial + minor arterial + collector.

The post processor is executed four times for each analysis year: one for each of the three vehicle types and another for all vehicle types combined. The post processor yields hourly jurisdictional VMT and VHT distributions by Mobile's 14 speed bins and two facility types. Figure 2 illustrates the post-processing of travel demand outputs. The post processor also includes provisions to add local VMT to the on-network VMT developed by the travel model, so that the full universe of travel is accounted for.

Figure 2 Post-Processing of Travel Demand Results

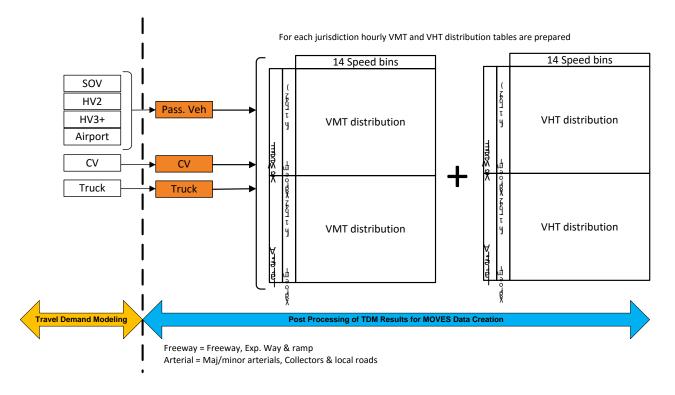

5.2 VMT/VHT Fractions

The MOVES2014a model requires annual VMT by five Highway Performance Monitoring System (HPMS) vehicle types:

- Motorcycle (sourceTypeID = 10);
- Light duty vehicle (sourceTypeID = 25);
- Buses (sourceTypeID = 40);
- Single unit trucks (sourceTypeID = 50); and
- Combination trucks (sourceTypeID =60).

Average annual weekday VMT estimates include on-network data from the travel demand model outputs as well as local road VMT estimates, which is added in exogenously. Auto access VMT for transit riders, acquired from a Metrorail Survey, is added to the VMT of Light Duty Vehicles (sourceTypeID = 25). Modeled VMT is divided into three vehicle types: passenger vehicles, commercial vehicles, and heavy duty vehicles. Local road VMT is developed by using a combination of observed and simulated data in the post-processing shown in Figure 4.

The local road VMT shares are added to VMT from the travel model to produce total VMT. The resulting total VMT of the three vehicle types is then classified by five MOVES vehicle types using observed jurisdictional Highway Performance Monitoring System (HPMS) VMT percentages. Figure 4 illustrates the process of developing annual VMT for five HPMS vehicle types.

Network VMT From travel demand model results Local VMT SOV from post processor from post processor Total VMT By HPMS Vehicle Type HV2 Pass. Veh Pass. Veh HV3+ X (Jur. HPMS daily VMT %) 10: Motorcycle Airport 25: Light Duty Vehicle Auto access VMT is added to Light Duty Vehicles CV CV CVX (Jur. HPMS daily VMT %) 50: Single Unit Turck Truck Truck Truck 60: Combination Truck 'Seasonal_adj_Est.Future Local VMT

School Bus + Transit Bus

Source: Pgs H10-H13, Appendix H in 2010 CLRP Report

Figure 3 Annual VMT Calculation Process

The average annual weekday VMT total by five HPMS vehicle types is entered into an EPA converter, <u>AAD VMT Calculator HPMS.XLS</u>, to convert average weekday VMT into average annual weekday travel. The converter includes local monthly adjustment factors and weekend-day adjustment factors. The converter generates three VMT fractions, 'monthVMTfraction,' 'dayVMTfraction' and 'hourlyVMTfraction' as outputs.

5.3 Average Speed

MOVES requires speed distributions by vehicle type and time period. Vehicle Hours of Travel (VHT) distributions are selected as a suitable proxy for average speed distribution. MWCOG/TPB's regional travel demand model outputs are first processed to derive VHT distributions for six vehicle categories:

- Single Occupancy Vehicles (SOV);
- High Occupancy Vehicles 2 (HOV2);
- High Occupancy Vehicles 3+ (HOV3 or more);
- Commercial Vehicles;
- Trucks; and
- Airport Passenger Trips.

40: Bus

Through post-processing, six VHT distributions are developed for three vehicle types, Mobile's 14 speed bins, hour of the day, and two facility types (i.e., freeways and arterials); and later reclassified into MOVES's 16 speed bins, hour of the day, day of the week (i.e., weekdays and weekend days), and four facility types. Six vehicle types from the travel demand model are reclassified into three vehicle types as follows:

- Passenger Vehicles = SOV + HOV2 + HOV3 (or more) + Airport Passenger Trips;
- Commercial Vehicles = Commercial Vehicles; and
- Heavy Duty Vehicles = Trucks.

MOVES requires: (1) 16 speed bins from 2.5 mph to 75 mph in increments of 5 mph; and (2) four road types, which are a combination of two facility types (i.e., restricted and unrestricted) and two environmental settings (i.e., urban and rural settings). The restricted facilities include freeways, expressways and freeway ramps, while the unrestricted facilities include major/minor arterials, collectors, and local roads. The following assumptions are used to develop average speed distributions fulfilling the MOVES requirements stated above:

1. VHT Distribution to Restricted Facilities:

- a. All vehicle types:
 - Weekday VHT Distribution:
 - All Day: Hourly distribution for all vehicles
 - Weekend VHT Distribution:
 - 11:00 am 7:00 pm: Distribution across the 13 MOVES vehicle type categories reflecting the 3:00 pm hour on a weekday
 - 7:01 pm 10:59 am: Distribution across the 13 MOVES vehicle type categories reflecting the 12:00 am hour on a weekday

2. VHT Distribution to Unrestricted Facilities:

- a. All vehicle types exclusive of refuse trucks, school buses and transit buses:
 - Weekday VHT Distribution:
 - All Day: Hourly distribution for all vehicles
 - Weekend VHT Distribution:
 - 11:00 am 7:00 pm: Distribution reflecting the 3:00 pm hour on a weekday
 - 7:01 pm 10:59 am: Distribution reflecting the 12:00 am hour on a weekday

- b. Refuse trucks: Refuse trucks operate on a 3-phase cycle: Phase 1 is the period of driving from the dispatch garage to trash collection sites; Phase 2 is the period of the actual trash/recycle collection; Phase 3 is the period of driving back to transfer stations. Using local data from Fairfax County, VA, the average speed of Phases 1 and 3 is assumed to be in the range of 22.5-27.5 miles per hour (i.e., MOVES Speed Bin 6), and the average speed of Phase 2 is assumed to be in the range of 2.5-7.5 miles per hour (i.e., MOVES Speed Bin 2). Based on the above assumptions the refuse truck vehicle type VHT distributions are as follows:
 - Weekday VHT Distribution (see Table 6):
 - 5:00 am-5:00 pm (Trash Collection): VHT hourly distributions according to Phases 1, 2 and 3.
 - 5:01 pm-5:00 am (On Road Phase): VHT hourly distribution consists of Phase 2.
 - Weekend VHT Distribution:
 - All Day: VHT distribution made up of Phase 1 and Phase 3 (on road phases)

c. School buses:

- Weekday VHT Distribution:
 - -6:00 am 6:00 pm: VHT distribution (see Table 7)
 - -6:00 pm 6:00 am: VHT distribution of heavy duty vehicles
- Weekend VHT Distribution:
 - 11:00 am-7:00 pm: VHT Distribution of heavy duty vehicles at 3:00 pm on a weekday
 - 7:00 pm 11:00 am: VHT Distribution of heavy duty vehicles at 12:00 am on a weekday

d. Transit buses:

- Weekday VHT Distributions (see Table 8):
 - -6:00 9:00 am: Per WMATA's bus speed distribution of the AM peak period
 - -9:00 am-3:00 pm: Per WMATA's bus speed distribution of the off-peak period
 - -3:00 6:00 pm: Per WMATA's bus speed distribution of the PM peak period
 - -6:00pm-6:00 am: Per WMATA's bus speed distribution of the off-peak period
- Weekend VHT Distribution (see Table 8):
 - -All Day: Per WMATA's bus speed distribution of the off-peak period.

Table 6 Average Weekday VHT Distribution for Refuse Trucks

Source: Fairfax County, VA

Speed Bins	Speed Range	5:00 AM - 5:00 PM	5:01 PM - 4:59 AM
1	speed < 2.5mph	0.00%	0.00%
2	2.5mph <= speed < 7.5mph	62.65%	0.00%
3	7.5mph <= speed < 12.5mph	0.00%	0.00%
4	12.5mph <= speed < 17.5mph	0.00%	0.00%
5	17.5mph <= speed <22.5mph	0.00%	0.00%
6	22.5mph <= speed < 27.5mph	37.35%	100.00%
7	27.5mph <= speed < 32.5mph	0.00%	0.00%
8	32.5mph <= speed < 37.5mph	0.00%	0.00%
9	37.5mph <= speed < 42.5mph	0.00%	0.00%
10	42.5mph <= speed < 47.5mph	0.00%	0.00%
11	47.5mph <= speed < 52.5mph	0.00%	0.00%
12	52.5mph <= speed < 57.5mph	0.00%	0.00%
13	57.5mph <= speed < 62.5mph	0.00%	0.00%
14	62.5mph <= speed < 67.5mph	0.00%	0.00%
15	67.5mph <= speed < 72.5mph	0.00%	0.00%
16	72.5mph <= speed	0.00%	0.00%

Table 7 VHT Distribution of School Buses (6:00 am - 6:00 pm)

Source: Fairfax County, VA

Speed Bins	Speed Range	Bus Trip 1	Bus Trip 2	Bus Trip 3	Bus Trip 4	Bus Trip 5	Bus Trip 6	Bus Trip 7	Bus Trip 8	Bus Trip 9	Bus Trip 10	Bus Trip 11	Weighted Average
1	speed < 2.5mph	35.20%	24.30%	17.58%	14.65%	7.90%	16.11%	6.65%	18.30%	25.76%	16.18%	17.67%	19.21%
2	2.5mph <= speed < 7.5mph	10.87%	11.57%	6.45%	11.04%	29.89%	20.20%	44.83%	11.01%	9.68%	6.49%	9.12%	14.39%
3	7.5mph <= speed < 12.5mph	10.90%	9.35%	12.89%	6.50%	26.31%	17.69%	3.34%	9.12%	9.52%	6.69%	8.69%	10.92%
4	12.5mph <= speed < 17.5mph	8.81%	9.18%	8.59%	9.45%	6.00%	11.13%	23.76%	10.12%	9.98%	8.46%	10.32%	10.37%
5	17.5mph <= speed <22.5mph	5.01%	10.15%	5.18%	14.04%	3.04%	5.94%	4.09%	10.36%	7.57%	9.74%	12.02%	8.30%
6	22.5mph <= speed < 27.5mph	8.91%	8.55%	11.62%	12.59%	6.18%	5.30%	3.54%	7.29%	7.11%	8.87%	11.73%	8.13%
7	27.5mph <= speed < 32.5mph	8.79%	7.97%	14.36%	11.28%	5.86%	13.33%	6.35%	9.43%	5.37%	10.06%	10.20%	9.41%
8	32.5mph <= speed < 37.5mph	5.33%	9.10%	5.86%	13.43%	7.62%	3.32%	6.36%	13.79%	8.68%	12.04%	6.81%	7.81%
9	37.5mph <= speed < 42.5mph	3.43%	6.89%	8.69%	7.02%	4.80%	3.76%	1.07%	7.94%	9.79%	13.81%	8.16%	7.22%
10	42.5mph <= speed < 47.5mph	1.72%	2.44%	8.79%	0.00%	2.40%	2.87%	0.00%	1.31%	5.83%	5.15%	4.75%	3.42%
11	47.5mph <= speed < 52.5mph	0.68%	0.00%	0.00%	0.00%	0.00%	0.36%	0.00%	0.67%	0.31%	2.27%	0.36%	0.59%
12	52.5mph <= speed < 57.5mph	0.34%	0.50%	0.00%	0.00%	0.00%	0.00%	0.00%	0.67%	0.41%	0.24%	0.18%	0.23%
13	57.5mph <= speed < 62.5mph	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
14	62.5mph <= speed < 67.5mph	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
15	67.5mph <= speed < 72.5mph	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
16	72.5mph <= speed	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%

Table 8 VHT Distribution of Transit Buses

Source: Washington Metropolitan Area Transit Authority (WMATA)

avgSpeedBinID	avgBinSpeed	avgSpeedBinDesc	6:00AM-9:00AM	3:00PM-6:00PM	9:01AM-2:59PM/6:01PM-5:59AM
1	2.5	speed < 2.5mph	9.94%	9.10%	7.92%
2	5	2.5mph <= speed < 7.5mph	13.79%	18.95%	14.49%
3	10	7.5mph <= speed < 12.5mph	34.07%	37.86%	31.36%
4	15	12.5mph <= speed < 17.5mph	28.52%	23.97%	29.17%
5	20	17.5mph <= speed <22.5mph	10.02%	5.92%	10.77%
6	25	22.5mph <= speed < 27.5mph	1.88%	1.84%	3.91%
7	30	27.5mph <= speed < 32.5mph	0.92%	0.85%	1.04%
8	35	32.5mph <= speed < 37.5mph	0.34%	0.60%	0.72%
9	40	37.5mph <= speed < 42.5mph	0.14%	0.50%	0.35%
10	45	42.5mph <= speed < 47.5mph	0.05%	0.15%	0.15%
11	50	47.5mph <= speed < 52.5mph	0.31%	0.28%	0.06%
12	55	52.5mph <= speed < 57.5mph	0.00%	0.00%	0.06%
13	60	57.5mph <= speed < 62.5mph	0.00%	0.00%	0.00%
14	65	62.5mph <= speed < 67.5mph	0.00%	0.00%	0.00%
15	70	67.5mph <= speed < 72.5mph	0.00%	0.00%	0.00%
16	75	72.5mph <= speed	0.00%	0.00%	0.00%

5.4 Road Type

MWCOG/TPB travel demand model has six facility types; and these facilities are grouped into two as follows for MOVES:

- Restricted facility = freeway + expressway + freeway ramp; and
- Unrestricted facility = major arterial + minor arterial + collector.

Restricted and Unrestricted facilities are further divided into urban or rural facilities. Thus five facility types were created as urban restricted, urban unrestricted, rural restricted, rural unrestricted, and off network.

5.5 Age Distribution

Every three years since 2005, the Departments of Motor Vehicles of the District of Columbia, Maryland, and Virginia have been supplying MWCOG/TPB with vehicle registration data for use in Air Quality Conformity (AQC) Determinations and State Implementation Plan (SIP) updates. The most recent 2014 Vehicle Identification Number (VIN) data are a snapshot of vehicle registrations by year, collected by Departments of Motor Vehicles in the three states. The VIN data contain a broad range of attributes of the vehicles registered in the jurisdictions of the Metropolitan Washington DC area. The latest data are used in the development of future year vehicle population profiles (i.e., vehicle age and vehicle type distribution) for all the analysis years in the Ozone Maintenance Plan.

Prior to using the VIN data as input to MOVES, the 'raw' vehicle registration data were decoded using a commercial decoding software program⁹. Following EPA's guidelines, the data were decoded in two steps: (1) the 'raw' data were decoded to a Mobile 6.2 format; and (2) the Mobile 6.2 format vehicle population distributions were converted to a MOVES format using an EPA converter¹⁰. Thus, 16 Mobile vehicle types and 25 vehicle age categories were mapped into MOVES' 13 vehicle and 31 vehicle age categories. The vehicle population of the 2014 VIN data was reviewed by the MWCOG/TPB technical oversight committees prior to becoming approved for transportation planning applications.

5.6 Fuel Formulation

The state air agencies of the District of Columbia, the state of Maryland, and the Commonwealth of Virginia provided fuel characteristics data for the analysis years in a MOVES2014a ready format. For year 2014, the gasoline sulfur content was 30 ppm or lower. For analysis years 2025 and 2030, the gasoline sulfur content used was 10 ppm, which is an assumption that is consistent with the 2014 Tier 3 rule of EPA.

5.7 Meteorology Data

The temperature and humidity data used for the 2008 Ozone Maintenance Plan were developed using July 2014 meteorology data from Dulles airport.

5.8 Ramp Fraction

Local data were used to estimate the local ramp fraction using a method approved by the MOVES Task Force. The locally-derived percentage is equal to 8 percent of VHT, which, coincidentally, is the same as the MOVES default value.

5.9 Road Type Distribution

Vehicle Miles Traveled (VMT) was distributed into MOVES 13 vehicle types and four road (facility) types. The method of developing VMT distribution was as follows:

- 1. Through post-processing of travel demand results, jurisdictional VMT distributions of six vehicle types were reclassified to VMT distributions by three vehicle types as follows:
 - •Passenger Vehicles = SOV + HOV2 + HOV3 (or more) + Airport Passenger Trips;
 - Commercial Vehicles = Commercial Vehicles; and
 - •Heavy Duty Vehicles = Trucks.

⁹ VinPower, Copyright; ESP Data Solutions Inc., Product version 4.0.0.16

¹⁰ RegistrationDistributionConverter_Veh16

- 2. VMT percentages by three vehicle types were allocated to MOVES vehicle types as follows:
 - Passenger Vehicles: VMT percentages by facility type were applied to motorcycles, passenger cars and passenger trucks;
 - Commercial Vehicles: VMT percentages by facility type were applied to commercial trucks;
 - Heavy Duty Vehicles: VMT percentages by facility type were applied to single unit short and long haul trucks, and combination short and long haul trucks;
 - Refuse Trucks and Motor Homes: MOVES default percentage values;
 - School, Transit and Intercity Buses (Tables 7 and 8): Local network percentages from local data sources (i.e., local bus operators); and
 - Urban and rural percentage split factors were used to further allocate facility type VMT between
 urban and rural facilities. These factors vary by jurisdiction, and were based on the latest
 HPMS VMT data provided by the three state transportation agencies. Figure 5 illustrates the
 process of allocating VMT by vehicle type, facility type, and urban/rural split.

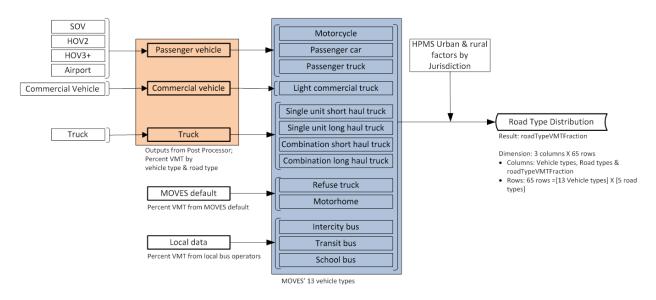


Figure 4 Road Type Distribution Development Process

5.10 Source Type (Vehicle) Population


Source type population, or vehicle population, was acquired from the vehicle registration (VIN) data. The VIN decoding software output vehicle population totals by Mobile 6.2 vehicle types. The vehicle population from the VIN data was then used to estimate vehicle population for each analysis year. Methods of estimating vehicle population vary by analysis year and availability of VIN data. For the 2014 analysis year, the 2014 vehicle population data were used. For 2025 and 2030, regression analysis was used to project future vehicle population totals based on available VIN data (collected from 1975 to 2014), which draws the 'best fitting' line among scattered VIN data points.

Table 9 shows vehicle population forecasts for each of the analysis years. Vehicle profiles of the 2014 VIN data are used to develop future year vehicle profiles by jurisdiction. Vehicle profiles were prepared in a Mobile format in this data processing first, and were converted to a MOVES vehicle type using a vehicle mapping table provided by EPA. Figure 6 shows the process of calculating source type population.

Table 9 Vehicle Population by Analysis Year

		MOVES Input Vel	hicle Populations (in vehicles/year)
State	Jurisdiction	2014	2025	2030
200	District of Columbia	291,662	328,864	346,756
DC	DC Total	291,662	328,864	346,756
	Calvert County	81,770	107,839	116,781
	Charles County	128,705	159,547	171,202
MD	Frederick County	206,817	262,998	281,962
טועו	Montgomery County	724,567	848,000	891,986
	Prince George's County	623,283	676,513	702,298
	MD Total	1,765,142	2,054,897	2,164,229
	Alexandria city	110,679	147,093	154,232
	Arlington County	142,002	160,608	166,170
VA	Fairfax County	906,630	1,098,015	1,167,554
VA	Loudoun County	282,436	341,626	375,857
	Prince William County	388,283	479,318	521,800
	VA Total	1,830,031	2,226,662	2,385,613
	Region Total	3,886,834	4,610,423	4,896,599

Figure 5 Source Type Population Development Process of Future Analysis Year

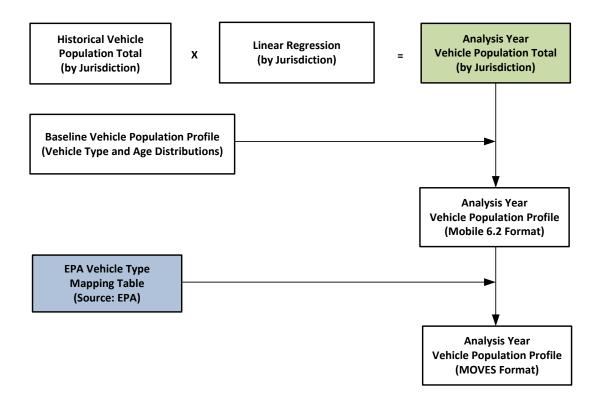

5.11 Inspection/Maintenance (I/M) Programs & Hoteling

The air agencies of the District of Columbia, Maryland, and Virginia provided details of Inspection/Maintenance (I/M) programs for all analysis years in a MOVES2014 ready format. Hoteling data are not provided by local air agencies, so the MOVES default hoteling data were used.

5.12 Federal and State Specific Control Programs

In addition to the environmental inputs there are state-specific programs that were taken into account in the analyses:

 <u>Early NLEV</u>: The District of Columbia, Maryland, and Virginia adopted an Early NLEV program, which was reflected in all analysis years. Early NLEV input database file – MOVES2014_early_NLEV

- <u>Stage II:</u> Varies by jurisdiction as follows:
 - <u>District of Columbia:</u> 1999 onwards Refueling vapor program adjustment- 0.9, Refueling spill program adjustment- 0.5 (MOVES2014a defaults)
 - Maryland: 1999 onwards Refueling vapor program adjustment- 0.7, Refueling spill program adjustment- 0.7, MOVES2014a Stage II database file - md_stageii_yy (provided by MDE on 6.04.2014)
 - Virginia: Refueling vapor program adjustment- .77 for years 1999-2010, .56 for years 2011-2013, and 0 for all other years; Refueling spill program adjustment- .77 for years 1999-2010, .56 for years 2011-2013, and 0 for all other years, MOVES2014a Stage II database file va_stage2_input_20161104 (provided by VDEQ on 11.04.2016)
 - <u>CAL-LEV /ZEV Programs</u>: Maryland's CAL-LEV program, adopted in 2011, is reflected in all analysis years. The following auxiliary files, provided by the Maryland Department of the Environment (MDE), were used to model these programs in the Maryland jurisdictions: MOVES2014a Cal-Lev Database File (MOVES2014a_caleviii2011); and MOVES2014a ZEV Program Information is included in all MD MS-Excel input files as a tab (ZEV_AVFT_MD_moves2014a).

6.0 RESULTS

On-road mobile inventories for the entire Ozone Maintenance Area are shown on Tables 10 and 11. Table 10 provides the total inventories for the Ozone Maintenance Area, and Table 11 summarizes the inventories by jurisdiction. The inventories were produced using MOVES2014a, which reflects federal fuel and vehicle technology (Tier 3) programs.

Table 10 Ozone Maintenance Plan On-Road Emissions Inventories (short tons/day)

Pollutant	2014	2025	2030
Carbon Monoxide (CO)	744.1	457.1	323.7
Nitrogen Oxides (NOx)	136.8	40.7	27.4
Volatile Organic Compounds (VOC)	61.2	33.2	24.1

Table 11 Ozone Maintenance Plan On-Road Emissions Inventories by Jurisdiction

		VOC (in short tons/day) NOX (in short tons/day)		CO (in short tons/day)						
State	Jurisdiction	2014	2025	2030	2014	2025	2030	2014	2025	2030
DC	District of Columbia	4.9	2.6	2.0	9.3	2.5	1.6	59.4	37.9	26.9
DC	DC Total	4.9	2.6	2.0	9.3	2.5	1.6	59.4	37.9	26.9
	Calvert County	1.4	1.0	0.6	2.3	0.9	0.5	14.6	8.2	5.3
	Charles County	2.3	1.3	0.9	4.7	1.4	0.9	21.9	12.3	9.0
MD	Frederick County	4.6	2.6	1.8	13.4	4.7	3.2	61.0	35.6	25.4
טועו	Montgomery County	10.7	5.6	4.1	22.1	6.3	4.3	128.4	76.6	54.8
	Prince George's County	12.2	5.8	4.0	28.3	7.9	5.1	154.6	89.4	62.9
	MD Total	31.2	16.3	11.4	70.9	21.2	14.0	380.6	222.2	157.4
	Alexandria city	1.4	0.8	0.6	2.6	0.8	0.5	15.7	10.3	7.3
	Arlington County	1.9	1.0	0.7	3.2	0.9	0.6	23.9	14.8	10.3
VA	Fairfax County	12.2	6.9	5.1	27.8	8.0	5.5	151.3	98.3	69.7
VA	Loudoun County	4.0	2.3	1.7	10.1	3.2	2.2	47.4	30.9	21.5
	Prince William County	5.7	3.4	2.5	13.0	4.1	2.9	65.8	42.7	30.7
	VA Total	25.2	14.3	10.7	56.7	17.0	11.7	304.0	196.9	139.5
Region Total		61.2	33.2	24.1	136.8	40.7	27.4	744.1	457.1	323.7

A detailed listing of MOVES inputs, outputs, and configuration files is provided in Attachment C.

ATTACHMENT A

Non-travel Related MOVES Inputs:

Daniel Son

Subject: FW: MOVES2014a Inputs (2008 Ozone NAAQS RR/MP Analysis)

Importance: High

From: Sunil Kumar

Sent: Monday, December 12, 2016 12:05 PM

To: Jinchul Park < jpark@mwcog.org>

Cc: Ronald Milone rmilone@mwcog.org>; Dusan Vuksan dvuksan@mwcog.org>; Jane Posey posey@mwcog.org>

Stephen Walz <swalz@mwcog.org>; Jennifer Desimone <jdesimone@mwcog.org>

Subject: MOVES2014a Inputs (2008 Ozone NAAQS RR/MP Analysis)

Importance: High

Please find the MS-Excel files containing MOVES2014a inputs for fuel supply, fuel usage fraction, fuel formulation, meteorology, and I/M programs for the milestone years 2014, 2025, and 2030 for the 2008 ozone NAAQS RR/MP analysis. These input files have been placed in the folder – H:\2008 Ozone SIP\2014_25_30

Please use the three control programs listed below for all milestone years mentioned above. Databases provided by states for modeling Early NLEV, Stage II, and Cal-Lev/ZEV programs are mentioned below.

Early NELV Program

Use early NLEV database titled "MOVES2014_early_NLEV" for DC, MD, and VA in all MOVES2014a runs for all milestone years.

Stage II

DC: MOVES2014a defaults

MD: MOVES2014a database (md_stageii_yy)

VA: MOVES2014a database (va_stage2_input_20161104)

Note: MDE provided Stage II inputs (valid for 1999 and beyond) on 06.04.2014.

VDEQ provided updated Stage II inputs (valid for 2014, 2025, and 2030) on 11.04.2016.

Cal-Lev Program (MD Only)

MOVES2014a Cal-Lev database (MOVES2014_caleviii2011)

MOVES2014a ZEV Program info- included in all MD excel input files as a tab (ZEV_AVFT_MD_moves2014a)

Note: Maryland's Cal-Lev program is valid for the year 2011 and beyond.

Meteorology

Meteorology inputs were developed for the ozone season analysis by using Dulles airport data for July 2014 in the MOVES2010a format by the COG/DEP staff.

Please use the "July/Weekday" combination to represent the average ozone season day for the MOVES2014a runs.

Thanks,

Sunil

1

ATTACHMENT B

MOVES TASK FORCE

Summary of Local Data Development for the County Data Manager (Emissions Inventory Approach)* as of January 11, 2011

LC	OCAL INPUT DATA CATEGORIES	DATA DESCRIPTION	DATA FORMAT MOVES	DATA DEVELOPMENT METHODOLOGY	LOCAL INPUT DATA APPROVAL DATE	
1	Age Distribution	Registered vehicles stratified by age and vehicle type	31 Age Groups (covering 0-30+ vears of vehicle age) 13 Vehicle Types	DTP used an EPA Converter to convert local registration data from MOBILE6.2 format to MOVES format	4/20/2010	
2	Average Speed Distribution	Average vehicle speeds stratified by vehicle type, road type, time of day/type of day (i.e., weekday vs weekend)	Distributions of hourly average vehicle speeds by vehicle type, road type, and type of day (weekday/weekend)	DTP used MOBILE6.2 post-processor speed distribution augmented by local input data for school and transit buses and refuse trucks	School Buses 9/21/2010 Refuse Trucks 9/21/2010 Transit Buses 10/19/2010	
3 4 5	Fuel Supply Fuel Formulation I/M Programs		MD/VA - EPA Methodology/local data in MOVES format DC - EPA Default Values	None Required (Direct Data Input from DC, MD, and VA air agencies)	Not Required	
6	Meteorology Data	Hourly temperature and relative humidity readings	Hourly Records of temperature and relative humidity in MOVES format Start Time: 12:00 am End Time: 11:00 pm	For Conformity Determinations - DEP converted meteorology data from existing SIPs to MOVES format using an EPA converter For Upcoming SIP Development - DEP compiled meteorology datasets from two weather stations based on a 3-yr period (2007-09) pending EPA approval	06/22/2010 (SIP for 2008 or Later Ozone Standard) 07/20/2010 (Conformity for Ozone & PM2.5 – 1997 Standards, CO – 1971 Standard)	
7	Ramp Fraction	Percentage of driving time on ramps stratified by road type	8% of VHT (EPA National Default)	DTP tested local input data and found consistent with the EPA National Default value	7/20/2010	
8	Road Type Distribution	Percentages of VMT allocated to each road type by vehicle type	VMT percentages by road type and vehicle type	DTP combined VMT from the travel demand model; and VMT distributions from the travel demand model, NEI data, and MOVES default data		
9	Source Type Population	Population of registered vehicles by county and vehicle type	13 Vehicle Types	DTP used vehicle registration and source type fractions		
10	Vehicle Type VMT	Annual VMT by HPMS vehicle type	Annual VMT allocated by HPMS vehicle type	DTP used daily VMT and an EPA converter	4/20/2010	

^{*} The Task Force adopted the Emissions Inventory Approach (October 19, 2010)

^{**} Documents can be found on the MOVES Task Forc http://www.mwcog.org/committee/committee/documents.asp?COMMITTEE_ID=253

MOVES TASK FORCE Summary of MOVES Data Development Documentation as of January 11, 2011

-				<u>l</u>	
L	LOCAL INPUT DATA CATEGORIES DATA DESCRIPTION		DATA DOCUMENTATION		
			METHODOLOGY	SENSITIVITY TESTING	
1	Age Distribution	Registered vehicles stratified by age and vehicle type	Memorandum titled "Development of Local Transportation Data Inputs for MOVES2010 Model" D. Sivasailam Memorandum Drafted: 4/13/2010 Memorandum Presented: 4/20/2010 (Item 3) Memorandum Revised: 5/14/2010 (Item 3b)	Memorandum titled "Results of MOVES 2010 Model Sensitivity", E. Lucas, Drafted/presented 4/20/2010 (Item 4) Memorandum titled "Results of MOVES2010 Model Sensitivity ," E. Lucas, Drafted/presented 5/18/2010 (Item 4a)	
	Average Speed	Average vehicle speeds stratified by vehicle type, road type, time of	Memorandum titled "Local Vehicle Hours of Travel (VHT) Distributions," D. Sivasailam Drafted/presented 7/20/10 (Item 3b) Tables titled "School Bus Average Speed Distribution," Drafted/presented 9/21/2010 (Item 3a)	Memorandum titled "Results of MOVES2010 Model Sensitivity Tests: Final Scenario for Average Speed Testing," E. Lucas Memorandum Drafted: 10/16/2010 Memorandum Presented: 10/19/2010 (Item 4)	
2	Distribution	day/type of day (i.e., weekday vs weekend)	Memorandum titled "Vehicle Hours of Travel (VHT) for Refuse Trucks," D. Sivasailam and E. Morrow, Drafted/presented on 9/21/2010 (Item 3a)	Memorandum titled "Proposed Sensitivity Tests with Different Average Speed Distributions/SIP Temperatures"	
			Memorandum titled "MOVES Vehicle Hours of Travel (VHT) Distribution for Transit Buses," Y. Gao" Drafted/presented on 10/19/2010 (Item 3)	Drafted/presented 9/21/2010 (Item 3a)	
3	Fuel Supply	Market share of available fuels by county, month, year, state	Memorandum titled "Development of Methodologies for	Memorandum titled "Results of MOVES2010 Model Sensitivity Tests:Manyland Clean Car Program-ZEV," E. Lucas, Drafted/presented 5/18/2010 (Item 4a)	
4	Fuel Formulation	Fuel formulation data stratified by state	Meteorology, I/M Program, and Fuel Inputs for Upcoming Ozone SIP (2008 or 2010 Standard) and Existing Conformity Analyses (Ozone & PM2.5 - 1997 Standards, CO - 1971		
5	I/M Programs	Available Inspection/Maintenance Programs stratified by state	Standard)," S. Kumar Drafted/presented 6/22/2010 (Item 4a)		
6	Meteorology Data	Hourly temperature and relative humidity readings	Memorandum titled "Development of Methodologies for Meteorology, I/M Program, and Fuel Inputs for Upcoming Ozone SIP (2008 or 2010 Standard) and Existing Conformity Analyses (Ozone & PM2.5 - 1997 Standards, CO - 1971 Standard)," S. Kumar Drafted/presented 6/22/2010 (Item 4a) Memorandum titled "Development of Meteorology Inputs for existing Conformity Analyses (Ozone & PM2.5 - 1997 Standards, CO - 1971 Standard)",)," S. Kumar Drafted/presented 7/20/2010 (Item3a)"	Memorandum titled "Results of MOVES2010 Model Sensitivity Tests:Maryland Clean Car Program-ZEV," E. Lucas, Drafted/presented 5/18/2010 (Item 4a)	
7	Ramp Fraction	Percentage of driving time on ramps stratified by road type	Memorandum titled "Results of MOVES 2010 Model Ramp Analysis," E. Lucas, Drafted/presented 7/20/2010 (Item 4a)	Memorandum titled "Results of MOVES 2010 Model Ramp Analysis," E. Lucas, Drafted/presented 7/20/2010 (Item 4a)	
8	Road Type Distribution	Percentages of VMT allocated to each road type by vehicle type	Memorandum titled "Development of Local Transportation Data Inputs for MOVES2010 Model," D. Sivasailam	Memorandum titled "Results of MOVES 2010 Model Sensitivity", E. Lucas, Drafted/presented 4/20/2010 (Item 4) Memorandum titled "Results of MOVES2010 Model Sensitivity," E. Lucas, Drafted/presented 5/18/2010 (Item 4a)	
9	Source Type Population	Population of registered vehicles by county and vehicle type	Memorandum Drafted: 4/13/2010 Memorandum Presented: 4/20/2010 (Item 3) Memorandum Revised: 5/14/2010 (Item 3b)		
10	Vehicle Type VMT	Annual VMT by HPMS vehicle type	Memorandum titled "Development of Annual VMT for MOVES2010."D. Sivasailam Memorandum Drafted: 4/16/2010 Memorandum Presented: 4/20/2010 (Item 3) Memorandum Revised: 5/14/2010 (Item 3b)	Memorandum titled "Results of MOVES 2010 Model Sensitivity", E. Lucas, Drafted/presented 4/20/2010 (Item 4) Memorandum titled "Results of MOVES2010 Model Sensitivity ," E. Lucas, Drafted/presented 5/18/2010 (Item 4a)	

ATTACHMENT C

Input, Output, and "Runspec" MOVES2014a Files for 2014, 2025, and 2030

Year 2014

Input	Output	Runspec
Ozone_DC_2014_NAAQ_In	Ozone_DC_2014_NAAQ_Out	Ozone_DC_2014_NAAQ.MRS
Ozone_NoAVFT_CAL_2014_NAAQ_In	Ozone_NoAVFT_CAL_2014_NAAQ_Out	Ozone_NoAVFT_CAL_2014_NAAQ.MRS
Ozone_AVFT_CAL_2014_NAAQ_In	Ozone_AVFT_CAL_2014_NAAQ_Out	Ozone_AVFT_CAL_2014_NAAQ.MRS
Ozone_NoAVFT_CHL_2014_NAAQ_In	Ozone_NoAVFT_CHL_2014_NAAQ_Out	Ozone_NoAVFT_CHL_2014_NAAQ.MRS
Ozone_AVFT_CHL_2014_NAAQ_In	Ozone_AVFT_CHL_2014_NAAQ_Out	Ozone_AVFT_CHL_2014_NAAQ.MRS
Ozone_NoAVFT_FRD_2014_NAAQ_In	Ozone_NoAVFT_FRD_2014_NAAQ_Out	Ozone_NoAVFT_FRD_2014_NAAQ.MRS
Ozone_AVFT_FRD_2014_NAAQ_In	Ozone_AVFT_FRD_2014_NAAQ_Out	Ozone_AVFT_FRD_2014_NAAQ.MRS
Ozone_NoAVFT_MTG_2014_NAAQ_In	Ozone_NoAVFT_MTG_2014_NAAQ_Out	Ozone_NoAVFT_MTG_2014_NAAQ.MRS
Ozone_AVFT_MTG_2014_NAAQ_In	Ozone_AVFT_MTG_2014_NAAQ_Out	Ozone_AVFT_MTG_2014_NAAQ.MRS
Ozone_NoAVFT_PG_2014_NAAQ_In	Ozone_NoAVFT_PG_2014_NAAQ_Out	Ozone_NoAVFT_PG_2014_NAAQ.MRS
Ozone_AVFT_PG_2014_NAAQ_In	Ozone_AVFT_PG_2014_NAAQ_Out	Ozone_AVFT_PG_2014_NAAQ.MRS
Ozone_FFX_2014_NAAQ_In	Ozone_FFX_2014_NAAQ_Out	Ozone_FFX_2014_NAAQ.MRS
Ozone_LDN_2014_NAAQ_In	Ozone_LDN_2014_NAAQ_Out	Ozone_LDN_2014_NAAQ.MRS
Ozone_PW_2014_NAAQ_In	Ozone_PW_2014_NAAQ_Out	Ozone_PW_2014_NAAQ.MRS

Year 2025

Input	Output	Runspec
Ozone_DC_2025_NAAQ_In	Ozone_DC_2025_NAAQ_Out	Ozone_DC_2025_NAAQ.MRS
Ozone_NoAVFT_CAL_2025_NAAQ_In	Ozone_NoAVFT_CAL_2025_NAAQ_Out	Ozone_NoAVFT_CAL_2025_NAAQ.MRS
Ozone_AVFT_CAL_2025_NAAQ_In	Ozone_AVFT_CAL_2025_NAAQ_Out	Ozone_AVFT_CAL_2025_NAAQ.MRS
Ozone_NoAVFT_CHL_2025_NAAQ_In	Ozone_NoAVFT_CHL_2025_NAAQ_Out	Ozone_NoAVFT_CHL_2025_NAAQ.MRS
Ozone_AVFT_CHL_2025_NAAQ_In	Ozone_AVFT_CHL_2025_NAAQ_Out	Ozone_AVFT_CHL_2025_NAAQ.MRS
Ozone_NoAVFT_FRD_2025_NAAQ_In	Ozone_NoAVFT_FRD_2025_NAAQ_Out	Ozone_NoAVFT_FRD_2025_NAAQ.MRS
Ozone_AVFT_FRD_2025_NAAQ_In	Ozone_AVFT_FRD_2025_NAAQ_Out	Ozone_AVFT_FRD_2025_NAAQ.MRS
Ozone_NoAVFT_MTG_2025_NAAQ_In	Ozone_NoAVFT_MTG_2025_NAAQ_Out	Ozone_NoAVFT_MTG_2025_NAAQ.MRS
Ozone_AVFT_MTG_2025_NAAQ_In	Ozone_AVFT_MTG_2025_NAAQ_Out	Ozone_AVFT_MTG_2025_NAAQ.MRS
Ozone_NoAVFT_PG_2025_NAAQ_In	Ozone_NoAVFT_PG_2025_NAAQ_Out	Ozone_NoAVFT_PG_2025_NAAQ.MRS
Ozone_AVFT_PG_2025_NAAQ_In	Ozone_AVFT_PG_2025_NAAQ_Out	Ozone_AVFT_PG_2025_NAAQ.MRS
Ozone_FFX_2025_NAAQ_In	Ozone_FFX_2025_NAAQ_Out	Ozone_FFX_2025_NAAQ.MRS
Ozone_LDN_2025_NAAQ_In	Ozone_LDN_2025_NAAQ_Out	Ozone_LDN_2025_NAAQ.MRS
Ozone_PW_2025_NAAQ_In	Ozone_PW_2025_NAAQ_Out	Ozone_PW_2025_NAAQ.MRS

Year 2030

Input	Output	Runspec
Ozone_DC_2030_NAAQ_In	Ozone_DC_2030_NAAQ_Out	Ozone_DC_2030_NAAQ.MRS
Ozone_NoAVFT_CAL_2030_NAAQ_In	Ozone_NoAVFT_CAL_2030_NAAQ_Out	Ozone_NoAVFT_CAL_2030_NAAQ.MRS
Ozone_AVFT_CAL_2030_NAAQ_In	Ozone_AVFT_CAL_2030_NAAQ_Out	Ozone_AVFT_CAL_2030_NAAQ.MRS
Ozone_NoAVFT_CHL_2030_NAAQ_In	Ozone_NoAVFT_CHL_2030_NAAQ_Out	Ozone_NoAVFT_CHL_2030_NAAQ.MRS
Ozone_AVFT_CHL_2030_NAAQ_In	Ozone_AVFT_CHL_2030_NAAQ_Out	Ozone_AVFT_CHL_2030_NAAQ.MRS
Ozone_NoAVFT_FRD_2030_NAAQ_In	Ozone_NoAVFT_FRD_2030_NAAQ_Out	Ozone_NoAVFT_FRD_2030_NAAQ.MRS
Ozone_AVFT_FRD_2030_NAAQ_In	Ozone_AVFT_FRD_2030_NAAQ_Out	Ozone_AVFT_FRD_2030_NAAQ.MRS
Ozone_NoAVFT_MTG_2030_NAAQ_In	Ozone_NoAVFT_MTG_2030_NAAQ_Out	Ozone_NoAVFT_MTG_2030_NAAQ.MRS
Ozone_AVFT_MTG_2030_NAAQ_In	Ozone_AVFT_MTG_2030_NAAQ_Out	Ozone_AVFT_MTG_2030_NAAQ.MRS
Ozone_NoAVFT_PG_2030_NAAQ_In	Ozone_NoAVFT_PG_2030_NAAQ_Out	Ozone_NoAVFT_PG_2030_NAAQ.MRS
Ozone_AVFT_PG_2030_NAAQ_In	Ozone_AVFT_PG_2030_NAAQ_Out	Ozone_AVFT_PG_2030_NAAQ.MRS
Ozone_FFX_2030_NAAQ_In	Ozone_FFX_2030_NAAQ_Out	Ozone_FFX_2030_NAAQ.MRS
Ozone_LDN_2030_NAAQ_In	Ozone_LDN_2030_NAAQ_Out	Ozone_LDN_2030_NAAQ.MRS
Ozone_PW_2030_NAAQ_In	Ozone_PW_2030_NAAQ_Out	Ozone_PW_2030_NAAQ.MRS